


### DESCRIZIONE DEL PRODOTTO

- » Indicato per il sollevamento di pezzi piani e tondi
- » Coefficiente di sicurezza superiore a 3
- » I magneti al neodimio garantiscono un'elevata forza di sollevamento

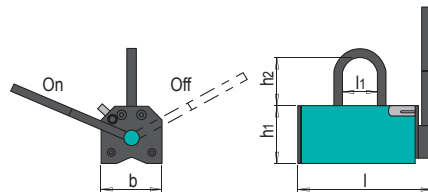

l	b	h1	h2	l1	s min.	d max.	kg max. RM <sup>1)</sup>	kg max. FM <sup>2)</sup>	N°	EUR
125	68	70	54	40	15	200	50	<b>100</b>	THL 100/ 100	<>
190	98	87	70	50	25	180	125	<b>250</b>	THL 100/ 250	<>
255	98	87	70	50	30	180	215	<b>500</b>	THL 100/ 500	<>
320	140	110	105	65	50	600	450	<b>1.000</b>	THL 100/1000	<>

1) kg max. RM: mass. forza di carico pezzi tondi

2) kg max. FM: mass. forza di carico pezzi piani

